

**ES Series**



---

**EaSy Door**<sup>™</sup>

**Doors** are ideally suited for new installations or for remodeling in masonry, tile, wood or other wall and ceiling surfaces. Door features rounded safety corners.

**Door and Frame** are fabricated from 20 gage, galvanized steel with a prime coat white finish.

**Frame** is one piece construction, 1" wide and provides perfect concealment of the rough wall opening. Wall frame is provided with bend down tabs and 1/4" mounting holes allowing faster installation.

**Concealed Pivoting Rod Hinge** prevents distortion and closes door squarely.

**Latch** is screwdriver operated.

**Finish** is a prime coat white.

**Guide Specification**

Provide Elmdor<sup>®</sup> ES Series, EaSy Doors<sup>™</sup> (Specify model number and options.) Access door and frame shall be fabricated from 20 gage, galvanized steel with a prime coat white finish. The door shall have rounded safety corners and a concealed pivoting rod hinge. Frame shall be one piece construction with no mitres or welds on the face. Frame also includes mounting holes and bend down tabs with concealed hinge. Latch shall be screwdriver operated. Finish shall be a prime coat white.



Member of U.S. Green  
Building Council

**ES**

Revised: 01/21/19




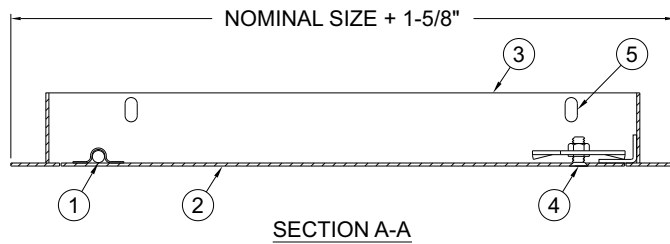
**STANDARD AVAILABLE SIZES**

Special sizes available upon request.

**NOMINAL DOOR SIZE (W X H)**



INCHES	WALL OPENING	LATCHES	LBS.
ES 6" x 6"	6-1/2" x 6-1/2"	1	1 lbs.
ES 8" x 8"	8-1/2" x 8-1/2"	1	2 lbs.
ES 10" x 10"	10-1/2" x 10-1/2"	1	2 lbs.
ES 12" x 12"	12-1/2" x 12-1/2"	1	3 lbs.
ES 14" x 14"	14-1/2" x 14-1/2"	1	4 lbs.
ES 16" x 16"	16-1/2" x 16-1/2"	1	5 lbs.
ES 18" x 18"	18-1/2" x 18-1/2"	3	6 lbs.
ES 20" x 20"	20-1/2" x 20-1/2"	3	7 lbs.
ES 22" x 22"	22-1/2" x 22-1/2"	3	8 lbs.
ES 24" x 24"	24-1/2" x 24-1/2"	3	8 lbs.

 FYI: Larger fixture sizes above 14" x 14" DO NOT rely on bent tabs only.



**NOTES:**

1. CONCEALED PIVOTING ROD HINGE
2. DOOR
3. FRAME
4. SCREWDRIVER OPERATED LATCH
5. MOUNTING HOLES
6. BEND DOWN TABS (4) PLACES

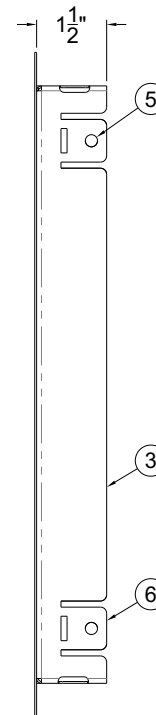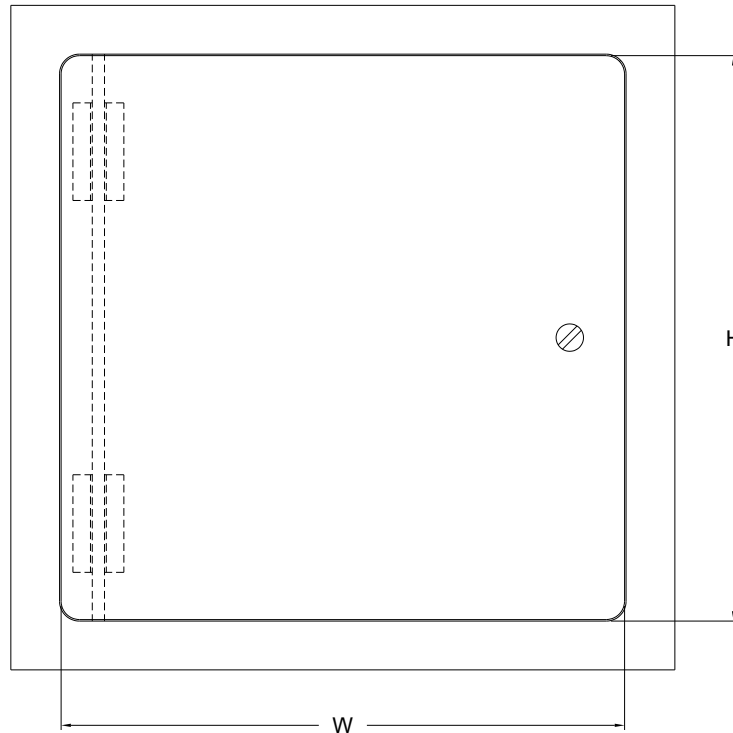

 **WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**

Dimensions are subject to manufacturer's tolerance of plus or minus 1/4". Elmdor/Stoneman assumes no responsibility for use of void or suspended data. Please visit [www.elmdorstoneman.com](http://www.elmdorstoneman.com) for most current specifications. © Copyright 2009 Elmdor/Stoneman, City of Industry, CA, A Division of Acorn Engineering Company.

**SELECTION SUMMARY & APPROVAL FOR MANUFACTURING**

Model Number & Options _____	Quantity _____
Company _____	Date _____
Contact _____	Title _____
Approval for Manufacturing/Signature _____	

**ES**

Revised: 01/21/19